



# Mille-Plug™



The best Plasterboard/Wallboard fixing available on the market today.  
Use for sciew sizes 4-10. Also excellent for soft Aircrete (AAC) Block.

## General Overview

An excellent and strong fixing for Plasterboard/Wallboard.  
Great for use in Aircrete (AAC) with density less than 400kg/m<sup>3</sup>.  
Designed to take a wider range of screw sizes than any other fixing on the market!

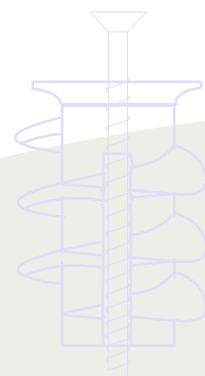

## Pull Out Tolerances/Safe Working Loads


The safe working loads have been calculated with a safety factor of x5:

	Thickness	Pull Out Resistance Straight Line	Shear Resistance with force exerted at 90°
Plasterboard	10mm (0.4 inch)	5.5kg (12lb)	18.6kg (41lb)
Plasterboard	13mm (0.5 inch)	7.3kg (16lb)	23.6kg (52lb)
Plasterboard	Laminated	15.4kg (34lb)	49.5kg (109lb)

## Applications

Fixing could not be easier just simply make a hole in your plasterboard with a No.2 recessed screwdriver or 6mm (¼ inch) drill and screw the Mille-Plug home.

The Mille-Plug can be used in soft Aircrete blocks (with density lower than 4.0kg/m<sup>3</sup>). Make a hole with a 6mm (¼ inch) drill or No.2 recessed screwdriver and simply screw the Mille-Plug in.

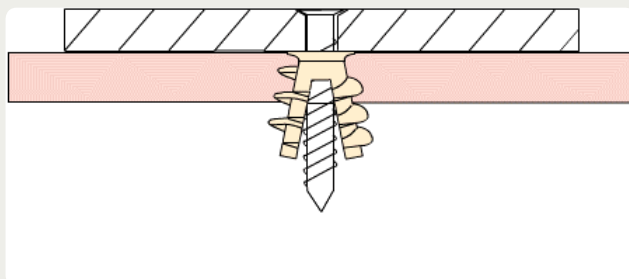

## Key Benefits

- Easily fixed into plasterboard.
- Takes a size 4-10 gauge screw.
- Superb pull out tolerances.
- Use also in soft Aircrete (AAC) block.



Product Code	EAN Code	Description	Pack Size	Packs per Outer Case
MPBM-NT100-BS-11	5060029110307	Mille-Plug (Universal Drywall Plug)	100	48